



Inspection/Quote Sheet

Name: _____

Telephone: _____


Email: _____

Saxophone Make/Model: _____

- Pad and Reso Choice
 - Pads:
 - Resos:
 - Add 1 Hour for Seamless Maestros

- Relacquered or replated? Y N

- Body work:
 - Sight body tube for straightness and roundness
 - Check for evidence of bell alignment issues:
 - Inspect guards/guard feet:
 - Check all other solder joints:
 - Does neck screw tighten at a 1/4 turn? Y N
 - Neck Fit -leak tester reading
 - Double socket neck?: Y N additional time needed:
 - Accutuner on neck? Y N additional time needed:
 - Other neck issues: pulled down, dents, tenon, reciever:

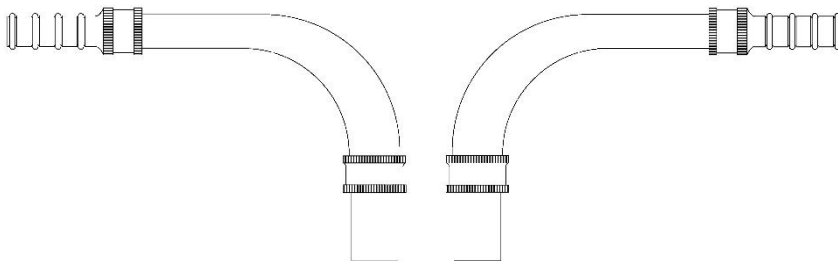




Inspection/Quote Sheet

- Posts issues:
 - Rods threaded into post past shoulder:
 - Rods exceptionally sloppy in post:
 - Are any posts countersunk too far:
 - Bottom post of C# Lever needs to be countersunk? Y N Time needed:
 - Post Alignment Issues:
 - Mechanical restoration: Additional time needed:

- Body/Dentwork
 - Body Tube:
 - Bow:
 - Bell/ Flare:

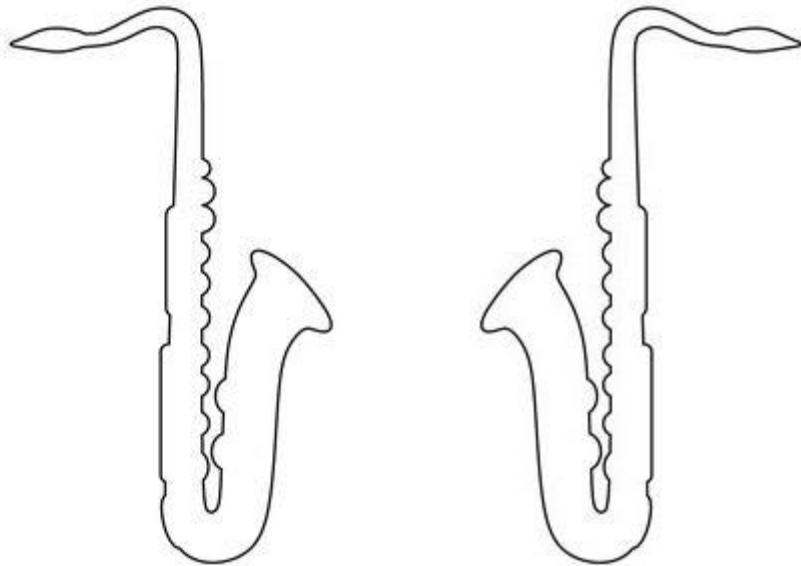



Inspection/Quote Sheet

- Finish
 - repair lacquer:
 - refinish all/some key touches (optional):
 - plating: **spot** or **send out**
 - Corrosion removal:
 - Silver/ Gold plated? Y N Time added for hand polishing:
 - Refinish entire horn? Y N
 - Add Time for Checking Keyfitting After Plating

- Tone holes
 - Rolled tone holes: Y N Time added:
 - Soldered tone holes: Y N Time added:
 - Out of round or damaged tone holes:
 - Significantly unlevel toneholes:
 - Add ____ hours to dentwork

- Springs
 - replace all: Y N
 - replace some:
 - Time needed:
 - Type to replace with:
 - Can springs be tensioned? Y N
 - Loose springs:

- Pearls
 - Replace all: Y N
 - Replace some:



Inspection/Quote Sheet

- Buescher
 - E Pearl lever needs key extension, sleeves, etc: Add 1 hour per sleeve or ext.
 - Buescher Snaps: Add .5 hours Pad Cups, 1 hour Dryfitting, 1 hour Padding

- Conn
 - Top stacks with many compound keys: Add 1 hour to keyfitting
 - Raising key heights with one piece arms: Add 1 hour to dryfitting
 - Rolled tone holes: Add 1 hour to tone holes
 - Double Socket Neck: Add 2 hours

- Selmer
 - Check Low Bb touch for slop: Add 1 hour per sleeve
 - Body to bow joint soldered?

- Martin/King
 - Soldered on tone hole damage/leaks?
 - Double Socket Neck: Add 2 hours

Other notes: